

AMPFIBIAN[®]
MINI

NEW!
2015

- 240V 10A 2400W CIRCUIT BREAKER
- RCD FOR PERSONAL PROTECTION
- PORTABLE - TAKE IT WITH YOU
- IP33 - INDOOR USE RECOMMENDED
- L-CLASS - FOR DIY / HANDYMAN
- TWO YEAR WARRANTY
- AUSTRALIAN STANDARDS APPROVED
- DESIGNED & MADE IN AUSTRALIA



WARRANTY



WATER



REC. USE



D.I.Y



TOUGH



N17479

**15A TO 10A POWER ADAPTER
WITH RCD + OVERLOAD PROTECTION
CONNECT 15A DEVICES TO STANDARD
10A POWERPOINTS SAFELY AND LEGALLY**

**ADAPT &
PROTECT**[™]

Contact Traxx:
1300 109 108
info@traxxcp.com.au
www.traxxcp.com.au




NO MORE DEATH-LEADS

Death-leads are 10A to 15A leads with a 15A socket at one end, and an illegally modified plug on the other. Commonly used by tradesmen and caravan/RV owners, they breach all electrical standards and create potentially lethal electrical connections.

Household powerpoints can safely supply 10A, well below the current drawn by 15A devices. The electrical hazards involved in connecting a 10A mains source to a 15A device are the reason 15A plugs do not fit into 10A powerpoints.

Many people use illegally modified plugs to circumvent this protection, putting themselves, their property and the people around them at risk. Insurance does not cover damage caused by illegally modified equipment.

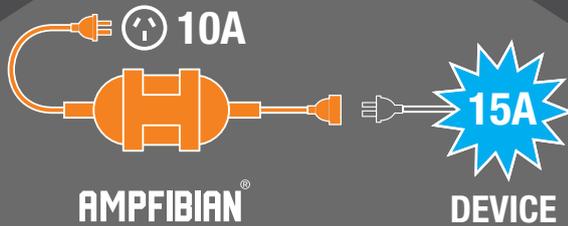

1. CONNECT 10A (DOMESTIC) POWER TO YOUR AMPFIBIAN.
2. CONNECT AMPFIBIAN TO 15A DEVICE FOR SAFE & LEGAL INDOOR / UNDERCOVER USE!

RCD+OVERLOAD PROTECTION

The Ampfibian® MINI safely and legally connects any 15A device to a regular 10A power supply, and offers additional protection from electrocution.

A 10A circuit breaker prevents overloading by cutting the power if it exceeds 10A (2400W).

A Residual Current Device (RCD) cuts the power very quickly if it detects an earth-leakage fault (which can be caused by faulty wiring or appliances).


¹ AS/NZS 3190:2011 "Approval and test specification – Residual current devices (current-operated earth-leakage devices)" which includes portable RCDs.

² Ampfibian will not convert 15A to 10A. Functionality of connected device may be limited if used to full capacity. Contact Ampfibian for further information.

³ RCDs will not prevent shock but will minimise the effects.

SPECIFICATION

- Complies with Australian Standards¹
- 10A 2400W circuit breaker²
- Residual Current Device (RCD) 30mA 10kA fault current³
- 220-240VAC 50-60Hz
- Ingress protected to IP33
- Power input plug 10A on 1.3m lead
- Power output socket fits 15A plug
- Shipping weight 0.8kg (1.8lb)
- Shipping size 110 x 93 x 305mm (4.3"x3.7"x12")
- Product size without leads 180 x 105 x 90mm (7"x4.1"x3.5")

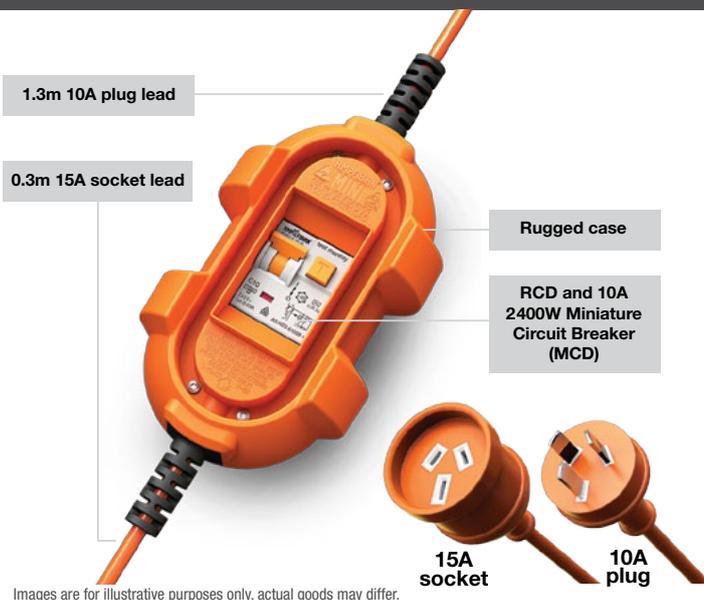

Images are for illustrative purposes only, actual goods may differ.

"The Ampfibian MINI is for people who want a high quality Australian made product, but don't need weatherproofing or heavy-duty trade and industrial features.

"With addition of the MINI to Ampfibian's product range, people now have a choice of products to match their needs."

David Betteridge
Founder and Director

